



Vitrina expositora para cafetería y pastelería

Pastry display case

A DESTACAR



Diseñada para cafeterías y pastelerías con un servicio rápido de auto-servicio en la parte inferior y presentación de pasteles en la parte superior.

BENEFITS

Designed for cafeterias and pastry shops providing a fast shelf services in the lower side. Upper side for exhibition pastry.







Vitrina expositora para cafetería y pastelería

Pastry display case

Serie
COMBO
Series

Fotos no contractuales / Non contractual pictures

A DESTACAR



Control

Mayor precisión en el sistema de control de la temperatura y humedad. Mayor facilidad para el ajuste del intervalo de temperaturas que deseamos conseguir.



Comprobación de fuga de gas

Todos los circuitos frigoríficos son **comprobados al 100%, en cámara de Helio** para la detección de la fuga de gas.



Iluminación

Incorporación de **iluminación LED**, llegando a **reducir** el consumo energético **entre un 80% y 90%**.



Normativas

Infrico está auditado y certificado por la organización internacional AENOR en **ISO 9001:2015** [Calidad]; **ISO 14001:2015** [Medio Ambiente]; **OSHAS 18001:2007** [Seguridad y Salud al trabajador], y por **INTERTEK** conforme con **UL 471 y NSF 7**.

BENEFITS

Control

Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.

Leak detection system

All the condensing units are **100% tested, in a Helium chamber** for the detection of gas leakage.

Lighting

LED lighting incorporated, **reducing** energetic consumption **between 80% and 90%**.

Certifications

Infrico is audited and certified by an international organization AENOR in **ISO 9001: 2015** [Quality]; **ISO 14001: 2015** [Environment]; **OSHAS 18001: 2007** [Worker Safety and Health] and by **INTERTEK** in accordance with **UL 471 and NSF 7**.

Parte superior neutra
Neutral countertop

Separador opcional
Optional divider



VC0 15

MOD.



Costados
Sides
(mm)



Potencia
Power
(W)



Capacidad
Capacity
(L)



Estantes
Shelving



Compresor
Compressor
(HP)



Control



Refrigerante
Coolant



De serie
Standard

MOD.	Costados Sides (mm)	Potencia Power (W)	Capacidad Capacity (L)	Estantes Shelving	Compresor Compressor (HP)	Control	Refrigerante Coolant	De serie Standard
VC09	30+30	1015	214	1	5/8	Digital	R-452	Cortina nocturna Night curtain
VC012	30+30	1070	280	1	3/4	Digital	R-452	Cortina nocturna Night curtain
VC015	30+30	1310	347	1	7/8	Digital	R-452	Cortina nocturna Night curtain
VC018	30+30	1405	414	1	1	Digital	R-452	Cortina nocturna Night curtain



Vitrina expositora para cafetería y pastelería

Pastry display case

CATÁLOGO GENERAL / GENERAL CATALOGUE 2019 | 

Serie
COMBO
Series

CARACTERÍSTICAS TÉCNICAS



Estructura

Chapa **prelacada**.
Plano de exposición en **EPOXI**.
Decoración en **DM hidrófugo** lacado.
Cristal frontal **templado** abatible.
Puertas correderas traseras.
Cristales laterales **dobles**.
Estante superior **neutro**.
Cortina **nocturna**.
Bancada en Acero **esmaltado**.
Plano de exposición y estantes iluminados mediante **LED**.
Perfiles en **aluminio anodizado**.
Temperatura regulada por un **controlador digital** y desescarche automático.



Refrigeración

Termostato electrónico trasero.
Sistema de **Condensación Ventilada**.
Sistema de **Evaporación Forzada**.
Bandeja evaporativa en acero inoxidable con **doble cuba**.

Estructure

Laminated steel plate.
Exhibition area in **EPOXI**.
Decoration **DM** lacqued.
Hinged front **tempered glass**.
Rear **sliding doors**.
Double lateral glass sides.
Dry countertop.
Night curtain.
Enamelled steel base.
LED lighting in the front.
LED lighting in canopy and under each shelf.
Digital temperature controller with automatic defrost system.

Refrigeration system

Rear **electronic thermostat**.
System of **Ventilated Condensation**.
Forced air refrigeration system.
Stainless Steel Evaporative **double trays**.



VCO 15




VCO 9

938 x 810 x 1455 mm.
Temp. +2°C / +5°C
C. Clima. 3 / 25°C
230v/1ph/50 Hz




VCO 12

1250 x 810 x 1455 mm.
Temp. +2°C / +5°C
C. Clima. 3 / 25°C
230v/1ph/50 Hz




VCO 15

1562 x 810 x 1455 mm.
Temp. +2°C / +5°C
C. Clima. 3 / 25°C
230v/1ph/50 Hz



VCO 18

1875 x 810 x 1455 mm.
Temp. +2°C / +5°C
C. Clima. 3 / 25°C
230v/1ph/50 Hz

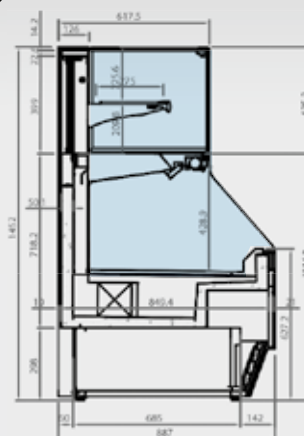

VCO

